


XBEAM 85F

SI-068F

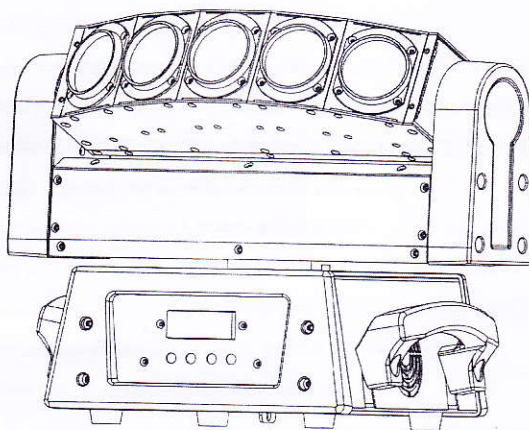

User Manual

KEEP THIS MANUAL FOR FUTURE NEEDS

1. Unpacking

Thank you for choosing Color Imagination's XBEAM 85F. For your own safety, please read this manual before installing the device. This manual covers the important information on installation and applications. Please install and operate the fixture with following instructions. Meanwhile, please keep this manual well for future needs.

Color Imagination's XBEAM 85F is made of a new type of high temperature strength of engineering plastics and cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.

SL-068F adopts 5PCS 10W CREE XLamp MC-E 4-IN-1 LEDs which features high brightness and stability. Please carefully unpack it when you receive the fixture and check whether it is damaged during the transportation. And please check whether the following items are included inside the box:

XBEAM 85F-----One	Signal Cable-----One
Omega Clamp-----Two	Power Cable-----One
Safety Chain-----One	User Manual-----One

2. Safety Instructions



CAUTION!
Be careful with your operations. With a dangerous voltage you can suffer a dangerous electric shock when touching wires!

This device has left the factory in perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.



Important:
Damages caused by the disregard of this user manual are not subject to warranty. The dealer will not accept liability for any resulting defects or problems.

If the device has been exposed to temperature changes due to environmental changes, do not switch it on immediately. The arising condensation could damage the device. Leave the device switched off until it has reached room temperature.

This device falls under protection-class I. Therefore it is essential that the device be earthed.

The electric connection must carry out by qualified person.

The device shall only be used with rate voltage and frequency.

Make sure that the available voltage is not higher than stated at the end of this manual.

Make sure the power cord is never crimped or damaged by sharp edges. If this would be the case, replacement of the cable must be done by an authorized dealer.

Always disconnect from the mains, when the device is not in use or before cleaning it. Only handle the power cord by the plug. Never pull out the plug by tugging the power cord.

During initial start-up some smoke or smell may arise. This is a normal process and does not necessarily mean that the device is defective, it should decrease gradually.

Please don't project the beam onto combustible substances.

Fixtures cannot be installed on combustible substances, keep more than 50cm distance with wall for smooth air flow, so there should be no shelter for fans and ventilation for heat radiation.

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

3. Operation Instructions

- The XBEAM 85F is for beam effect for on-site decoration purpose.
- Don't turn on the fixture if it's been through severe temperature difference like after transportation because it might damage the light due to the environment changes. So make sure to operate the fixture until it is in normal temperature.
- This light should be keep away from strong shaking during any transportation or movement.
- Don't pull up the light by only the head, or it might cause damages to the mechanical parts.
- Don't expose the fixture in overhear, moisture or environment with too much dust when installing it. And don't lay any power cables on the floor. Or it might cause electronic shock to the people.
- Make sure the installation place is in good safety condition before installing the fixture.
- Make sure to put the safety chain and check whether the screws are screwed properly when installing the fixture.
- Make sure the lens are in good condition. It's recommended to replace the units if there are any damages or severe scratch.
- Make sure the fixture is operated by qualified personnel who knows the fixture before using.
- Keep the original packages if any second shipment is needed.
- Don't try to change the fixtures without any instruction by the manufacturer or the appointed repairing agencies.
- It is not in warranty range if there are any malfunctions from not following the user manual to operate or any illegal operation, like shock short circuit, electronic shock, lamp broke, etc.

4. Mounting and Installation

Cautions: For added protection mount the fixtures in areas outside walking paths, seating areas, or in areas where the fixture might be reached by unauthorized personnel.

Before mounting the fixture to any surface, make sure that the installation area can hold a minimum point load of 10 times the device's weight.

Fixture installation must always be secured with a secondary safety attachment, such as an appropriate safety cable.

Never stand directly below the device when mounting, removing, or servicing the fixture.

from a ceiling, or set on a flat level surface (see illustration below). Be sure this fixture is kept at least 0.5m (1.5 ft) away from any flammable materials (decoration etc.).


Always use and install the supplied safety cable as a safety measure to prevent accidental damage and/or injury in the event the clamp fails.

Mounting points: Overhead mounting requires extensive experience, including amongst others calculating working load limits, a fine knowledge of the installation material being used, and periodic safety inspection of all installation material and the fixture. If you lack these qualifications, do not attempt the installation yourself. Improper installation can result in bodily injury.

Be sure to complete all rigging and installation procedures before connecting the main power cord to the appropriate wall outlet.

Clamp Mounting: The XBEAM 85F provides a unique mounting bracket assembly that integrates the bottom of the base, and the safety cable rigging point in one unit (see the illustration below).

When mounting this fixture to truss be sure to secure an appropriately rated clamp to the included omega bracket using a M10 screw fitted through the center hole of the "omega bracket". As an added safety measure be sure to attached at least one properly rated safety cable to the fixture using on of the safety cable rigging point integrated in the base assembly

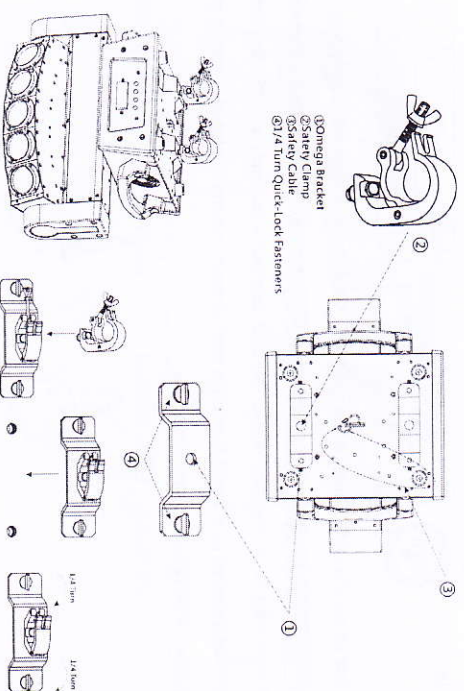

Regardless of the rigging option you choose for your XBEBAM 85F, always be sure to secure your fixture with a safety cable. The fixture provides a built-in rigging point for a safety cable on the hanging bracket as illustrated above. Be sure to only use the designated rigging point for the safety cable and never secure a safety cable to a carrying handle.


5. DMX-512 control connections

Connect the provided XLR cable to the female 3-pin XLR output of your controller and the other side to the male 3-pin XLR input of the moving head. You can chain multiple


Moving head together through serial linking. The cable needed should be two core, screened cable with

XLR input and output connectors. Please refer to the diagram below.

DMX-512 connection with DMX terminator

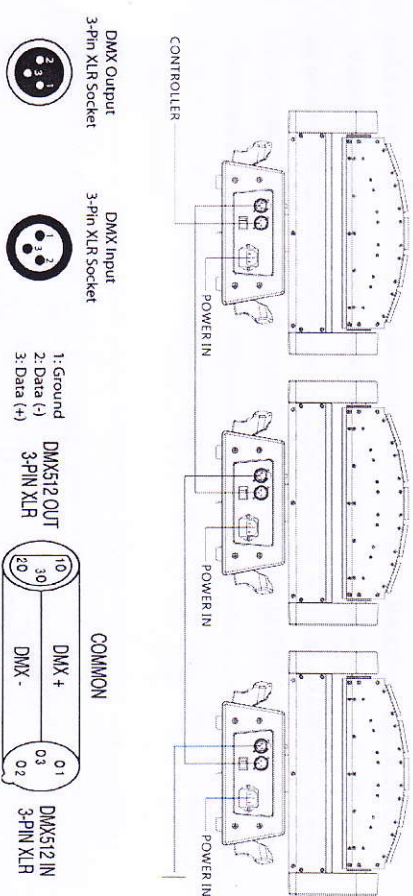


For installations where the DMX cable has to run a long distance or is in an electrically noisy environment, such as in a discotheque, it is recommended to use a DMX terminator. This helps in preventing corruption of the digital control signal by electrical noise. The DMX terminator is simply an XLR plug with a 120 Ω resistor connected between pins 2 and 3, which is then plugged into the output XLR socket of the last fixture in the chain. Please see illustrations below.



6. Menu Operations

MODE	ADDR	VALU	A001~AXXX (AXXX)	
		SLAV	ON/OFF (SLAV)	
	AUTO	IP1~8	ALON (AU-A)	
			MAST (AU-M)	
	SOUN	IP1~8	ALON (SO-A)	
SET			MAST (SO-M)	
	MIC	M-XX		
	LODA	ON/OFF		
	VER	V-1.0~V-9.9		
	MOD1			
	MOD2			
DMX				
REST	ON/OFF			

7. Photometric Data

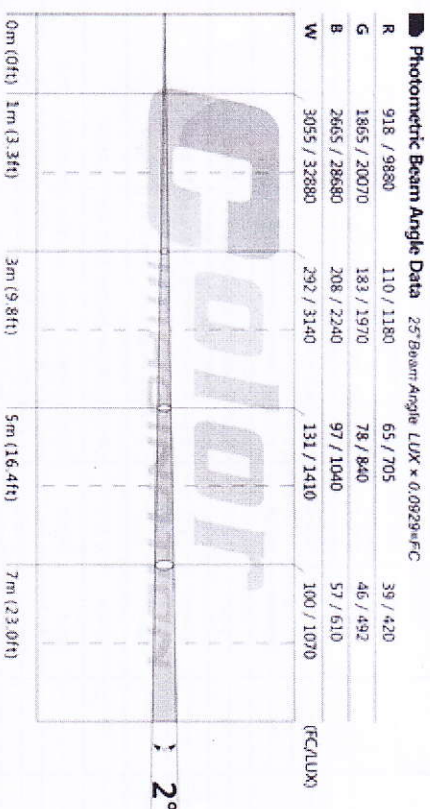

8 DMX Channels

Channel	Function	Values	Description
168	88		
1	1 PAN	0-255	PAN Movement
2	PAN Fine	0-255	Fine control of Pan movement ³
3	2 TILT	0-255	Tilt Movement
4	TILT FINE	0-255	Fine control of Tilt movement
		0-225	Max to min speed
		226-235	Blackout by movement
		236-245	Blackout by all wheel changing
		246-255	No function
5	3 Speed		
		0-031	Shutter closed
		032-063	Shutter open
		064-095	Strobe effect slow to fast
		096-127	Shutter open
		128-159	Pulse-effect in sequences
		160-191	Shutter open
		192-223	Random strobe effect slow to fast
		224-255	Shutter open
7	5 Dimmer	0-255	0...100% Linear Dimmer
8	6 Red	0-255	0-100% Red dimmer from dark to bright
9	7 Green	0-255	0-100% Green dimmer from dark to bright
10	8 Blue	0-255	0-100% Blue dimmer from dark to bright
11	9 White	0-255	0-100% White dimmer from dark to bright
12		0-255	0-100% Red in pixel 1 saturation control(0-100%)
13		0-255	0-100% Green in pixel 1 saturation control(0-100%)
14		0-255	0-100% Blue in pixel 1 saturation control(0-100%)
15		0-255	0-100% White in pixel 1 saturation control(0-100%)
16		0-255	0-100% Red in pixel 2 saturation control(0-100%)
17		0-255	0-100% Green in pixel 2 saturation control(0-100%)

18	Blue 2	0-255	0-100% Blue in pixel 2 saturation control(0-100%)
19	White 2	0-255	0-100% White in pixel 2 saturation control(0-100%)
20	Red 3	0-255	0-100% Red in pixel 3 saturation control(0-100%)
21	Green 3	0-255	0-100% Green in pixel 3 saturation control(0-100%)
22	Blue 3	0-255	0-100% Blue in pixel 3 saturation control(0-100%)
23	White 3	0-255	0-100% White in pixel 3 saturation control(0-100%)
24	Red 4	0-255	0-100% Red in pixel 4 saturation control(0-100%)
25	Green 4	0-255	0-100% Green in pixel 4 saturation control(0-100%)
26	Blue 4	0-255	0-100% Blue in pixel 4 saturation control(0-100%)
27	White 4	0-255	0-100% White in pixel 4 saturation control(0-100%)
28	Red 5	0-255	0-100% Red in pixel 5 saturation control(0-100%)
29	Green 5	0-255	0-100% Green in pixel 5 saturation control(0-100%)
30	Blue 5	0-255	0-100% Blue in pixel 5 saturation control(0-100%)
31	White 5	0-255	0-100% White in pixel 5 saturation control(0-100%)
		0-015	No function
		016-035	Macro 1 from slow to fast
		036-055	Macro 2 from slow to fast
		056-075	Macro 3 from slow to fast
		076-095	Macro 4 from slow to fast
		096-115	Macro 5 from slow to fast
		116-135	Macro 6 from slow to fast
		136-155	Macro 7 from slow to fast
		156-175	Macro 8 from slow to fast
		176-195	Macro 9 from slow to fast
		196-215	Macro 10 from slow to fast
		216-235	Macro 11 from slow to fast
		236-255	Macro 12 from slow to fast

33	11	Special	0-019	No function
			020-029	No function
			030-039	No function
			040-079	No function
			080-099	Motor reset after 8 seconds
			100-119	Internal program 1
			120-139	Internal program 2
			140-159	Internal program 3
			160-179	Internal program 4
			180-199	Internal program 5
			200-219	Internal program 6
			220-239	Internal program 7
			240-255	Internal program 8

9. Key Features

5PCS 10W CREE XLamp MC-E 4-IN-1 LEDs

50,000 hours lifespan and low power consumption

5 pixels (each LED is a pixel), controllable individually

Outstanding white BEAM effect

Specific optic system

High light output with 420LUX(R), 492LUX(G), 610LUX(B), 1070LUX@7M for 1 BEAM

High efficiency LED shutter

Strobe effect with 18 flashes per second and pulse effect

0-100% smooth linear dimmer

Amazing streaming effect

8 built-in default programs for easy performance

12 default pixel macros effect

11/33 DMX channels

DMX512, master-slave and sound activated controllable or auto operation

LED display

Efficient Noise low noise fan cooling system

IEC power connector

3-pin XLR connectors IN/OUT

Two 1/4 turn fastening Omega Clamps

10. Technical Specifications

Input Voltage: AC90-260V 50/60Hz

LED Quantities: 5PCS 10W CREE XLamp MC-E 4-IN-1 LEDs

Control Signal: DMX512, master-slave and sound activated or auto operation

Control Channel: 11/33 DMX Channels switchable

Power Consumption: 86W

Dimensions: 277(D)*393(W)*313(H)mm

Packing Dimensions: 460(D)*365(W)*375(H)mm

Net Weight: 7.52kg

Gross Weight: 10.52kg

11. Maintenance and Cleaning

The following points have to be considered during the inspection:

- 1) All screws for installing the devices or parts of the device have to be tightly connected and must not be corroded.
- 2) There must not be any deformations on the housing, color lenses, fixations and installation spots (ceiling, suspension, trussing).
- 3) Mechanically moved parts must not show any traces of wearing and must not rotate with unbalances.
- 4) The electric power supply cables must not show any damage, material fatigue or sediments.

Further instructions depending on the installation spot and usage have to be adhered by a skilled installer and any safety problems have to be removed.



CAUTION!

Disconnect from mains before starting maintenance operation.

In order to make the lights in good condition and extend the life time, we suggest a regular cleaning to the lights.

- 1) Clean the inside and outside lens each week to avoid the weakness of the lights due to accumulation of dust.
- 2) Clean the fan each week.
- 3) A detailed electric check by approved electrical engineer each three month, make sure that the circuit contacts are in good condition, prevent the poor contact of circuit from overheating.

We recommend a frequent cleaning of the device. Please use a moist, lint- free cloth. Never use alcohol or solvents.

There are no serviceable parts inside the device. Please refer to the instructions under "Installation instructions".

Should you need any spare parts, please order genuine parts from your local dealer.