

Color
IMAGINATION

the POWER of DREAM



**Smaller
Better**

MINISPOT 50 / MINIBEAM 50

SI-098 MINISPOT 50

- Smaller---very compact in size and weight
- Better---very high in output (3360LUX@5m)



The MINISPOT 50 features a 50W LED with high intensity and efficiency. It produces very high light output similar to a 90W spot, through a specific 9.4° optic system. The PAN/TILT integrates in fast and quiet movement. It offers a full complement of professional characteristics, including a rotating gobo wheel (6 interchangeable gobos plus open), a color wheel (7 colors plus open), a 3-facet prism, motorized linear focus, 0-100% linear LED dimmer, variable speed shutter/strobe.

Features

- A 50W white LED lamp
- 50000 hours life span and low power consumption
- 8/16 bit smooth and precise resolution for PAN/TILT movement
- 540°/630° PAN and 270° TILT movement
- Scan position memory, auto reposition after unexpected movement
- Specific optic system with 9.4° projection angle• Improved optics and flat beam field
- 1 rotatable gobo wheel with 6 rotatable and interchangeable gobos plus open with speed adjustable, stream effect, dithering effect and rotatable clockwise or anticlockwise
- Gobo size 26.9mm (external dimensions)/21mm (inner dimensions)
- 1 color wheel with 7 colors plus open
- Variable direction rainbow effect with speed adjustable
- 2 meter to infinite electric focus
- 1 3-facet prism with variable speed and direction
- 0-100% linear LED dimmer
- 25T/sec high speed LED shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- 11/13 DMX channels USITT DMX-512
- DMX512, master-slave, and sound activated controllable or auto operation (7 built-in programs)
- DMX recorder and edit function integrated
- IEC connector IN
- 3-pin XLR connectors IN/OUT
- Fan cooling system
- Constant temperature readout and management function
- 45°C max ambient temperature
- IP20 protection rating

- 55dB at 3'dB rating
- 1*hanging kit

Specifications

Input Voltage:AC90-260V 50/60Hz

LED Quantities:1*50W white LED

Control Signal:DMX512, master-slave and sound activated or auto operation

Control Channel: 11/13 DMX channels USITT DMX-512

Power Consumption: 55W



Dimensions:149(D)*270(W)*366(H)mm

Packing Dimensions:350(D)*450(W)*240(H)mm

Net Weight:6.6kg

Gross Weight:7.6kg

Photometric Beam Angle Data 9.4° Beam Angle $LUX \times 0.0929 = FC$

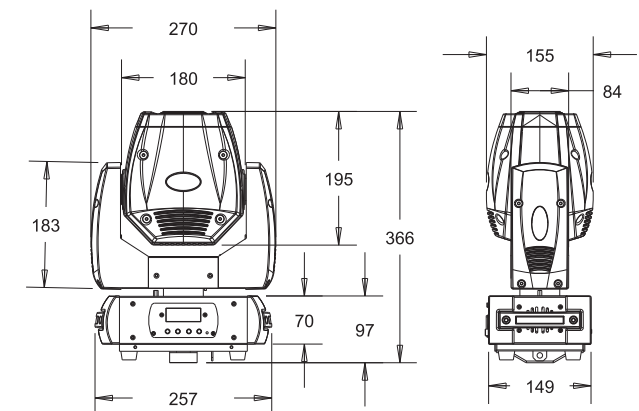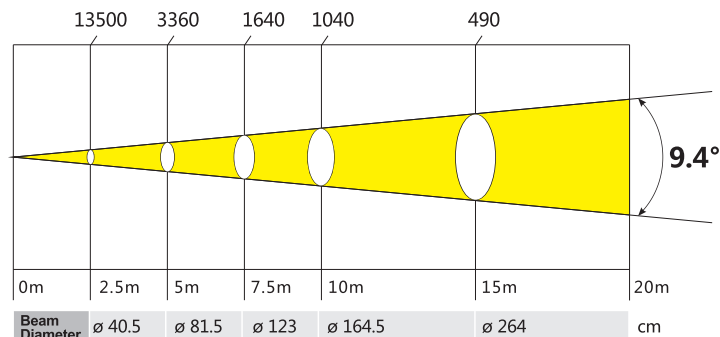

SI-099 MINIBEAM 50

- Smaller---very compact in size and weight
- Better---very high in output (19680LUX@5m)



The MINIBEAM 50 features a 50W LED with high intensity and efficiency. It produces very high light output much higher than the 90W beam, through a specific 2° optic system. The PAN/TILT integrates in fast and quiet movement. It offers a full complement of professional characteristics, including a static gobo wheel (17 gobos plus open), a color wheel (14 colors plus open), a 8-facet prism, 0-100% linear LED dimmer, variable speed shutter/strobe.



Features

- A 50W white LED lamp
- 50000 hours life span and low power consumption
- 8/16 bit smooth and precise resolution for PAN/TILT movement
- 540°/630° PAN and 270° TILT movement
- Scan position memory, auto reposition after unexpected movement
- Specific optic system with 2° projection angle
- Improved optics and flat beam field
- 1 static gobo wheel with 17 gobos plus open
- 1 color wheel with 7 colors plus open
- Variable direction rainbow effect with speed adjustable
- 2 meter to infinite electric focus
- 8-facet prism with variable speed and direction
- 0-100% linear LED dimmer
- 25T/sec high speed LED shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- 9/11 DMX channels USITT DMX-512
- DMX512, master-slave, and sound activated controllable or auto operation (7 built-in programs)
- DMX recorder and edit function integrated
- Red background LED display
- IEC connector IN
- 3-pin XLR connectors IN/OUT
- Fan cooling system
- Constant temperature readout and management function
- 45°C max ambient temperature
- IP20 protection rating
- 55dB at 3'dB rating
- 1*hanging kit

Specifications

Input Voltage: AC90-260V 50/60Hz
 LED Quantities: 1*50W white LED
 Control Signal: DMX512, master-slave and sound activated or auto operation
 Control Channel: 9/11 DMX channels USITT DMX-512
 Power Consumption: 55W
 Dimensions: 149(D)*270(W)*364(H)mm
 Packing Dimensions: 350(D)*450(W)*240(H)mm
 Net Weight: 5.8kg
 Gross Weight: 6.8kg

Photometric Beam Angle Data $2^\circ \text{Beam Angle } LUX \times 0.0929 = FC$

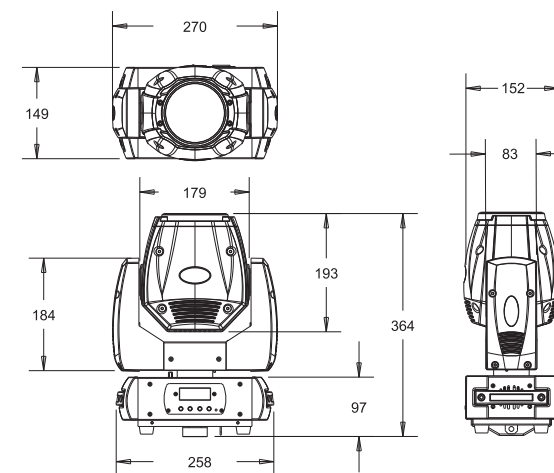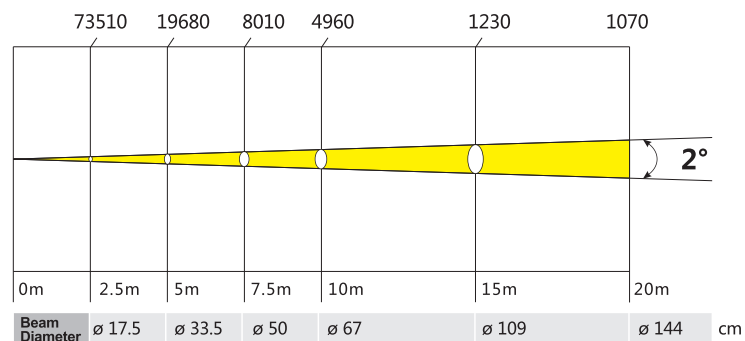



the **POWER** of **DREAM**



ADD: 3rd Floor, No. 288, Guangzhu East Line, Pingwen,
Lanhe Town, Nansha District, Guangzhou, China
Tel. : +86 20 8499 2310/2320/2330
Fax : +86 20 8499 2360
E-mail : info@color-imagination.com
<http://www.color-imagination.com>



www.facebook.com/color.imagination.1



www.youtube.com/user/colorimaginationj



twitter.com/colorimaginej